


NPW-Series - Valve Regulated Lead Acid Battery

NPW45-12

Data Sheet

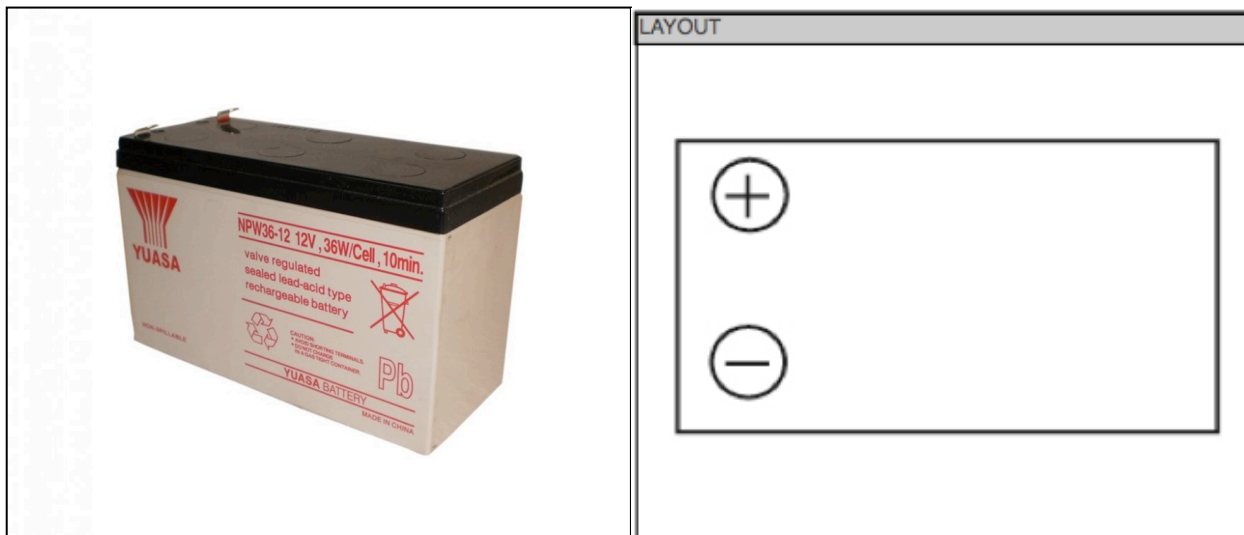

Battery Specifications

(Model)	ABS Flame class	Dimensions (mm)			Weight Approx.(kg)	Terminal
		(L)	(W)	Overall(H)		
NPW36-12	UL94HB, UL94V0	151	65	97.5	2.2	A, B

Discharge capacity

PERFORMANCE DATA AT 25C(77F) - Amperes and Watts										
F.V	Time	5M	10M	15M	30M	1H	3H	5H	10H	20H
		10.8V	W	282	194	149	90.7	52.5	21.4	14.0
	A	24.9	16.9	12.8	7.71	4.42	1.79	1.16	0.62	0.34
10.5V	W	302	204	155	93.6	53.8	21.7	14.1	7.63	4.22
	A	27.0	17.8	13.3	7.95	4.53	1.81	1.17	0.63	0.35
10.2V	W	316	209	158	95.2	54.6	21.9	14.2	7.67	4.24
	A	28.5	18.3	13.5	8.09	4.59	1.83	1.18	0.63	0.35
9.6V	W	330	216	162	97.3	55.7	22.4	14.5	7.83	4.33
	A	30.4	19.3	14.0	8.32	4.68	1.87	1.20	0.64	0.35

* 蓄電池交貨時，經完全充電（電壓14.4V/只（MAX. 0.25C20）充電16hr）後，1天內測試應達上述放電容量100%以上。

